

Searching PAJ

1/2 ページ

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 03-118168

(43)Date of publication of application : 20.05.1991

(51)Int.Cl.

B41J 2/44
B41J 2/45
B41J 2/455

(21)Application number : 02-254013

(22)Date of filing : 20.09.1990

(71)Applicant : HEWLETT PACKARD CO <HP>

(72)Inventor : KALATA STEVEN
PAOLINI STEVEN
REID DONALD M
BROWN CHARLES A
THAYER BILLY E

(30)Priority


Priority number : 89 410150 Priority date : 20.09.1989 Priority country : US

(54) LED PRINTING HEAD DRIVING CIRCUIT

(57)Abstract:

PURPOSE: To eliminate the non-uniformity of light output in space frequency capable of being sensed by a human's eye by enabling the substantially uniform exposure of a plurality of groups consisting of light emitting elements in response to a data signal and supplying the data signal to the respective light emitting elements.

CONSTITUTION: A programmable reference current cell generates secondary reference voltage V_r in the drain of a secondary reference FET 23. A programmable current cell generates voltage V_{rk} from reference voltage V_{r1} different corresponding to related data words $C1-Cn$. The secondary reference voltage is respectively connected to groups of LED driver FETs 24. An output driver 24 is series from a p-channel data FET 2511 to 25ur. A data FET is a switch gated by a data signal D_{uv} from a data signal $D11$. On the basis of the presence of the data signal, it is determined whether LED 2611-26uv light.

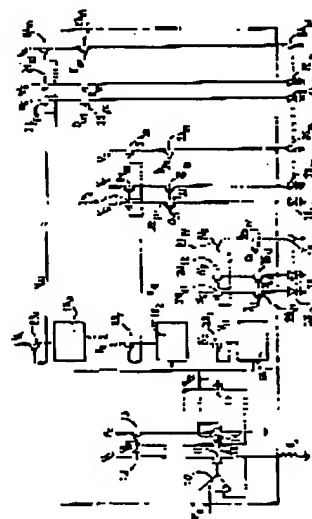

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

Searching PAJ

2/2 ページ

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision
of rejection]

[Date of requesting appeal against examiner's
decision of rejection]

[Date of extinction of right]